



S E A S O N

SE/EN

SUPERIOR COLLECTION

Your home deserves the best Acrylic Laminate that brings luxury and strength together.





WHY US

Benetti is about innovation, ingeniousness and execution with the finest form and function. Benetti has been specifically curated to make designer and decorative laminates that has a versatile ethos. Benetti is range that flaunts a natural flair, where eco-friendly surfaces become a norm and sustainability creates phenomenal possibilities of juxtaposing great aesthetics with enormous poise. it has an extensive products range consisting of designer laminates and decorative products.

- For exceptional solidity, our 6H Anti scratch Acrylic Laminates are available in 2.5~1.3mm Thickness
- Our laminates are specially treated to ensure they remain termite and borer free for several eyes.
- Our Anti Scratch Acrylic Laminates are extremely sturdy and durable. They can withstand heavy loads easily.
- For ease of use and effortless installation or range of laminates have been developed in a way to keep them extremely light weight.
- Treated with a special coating on the surfaces, our 6H Anti Scratch Acrylic Laminates are water proof as well as stain resistant
- Our range of laminates has effortless ans exceptional adhesion properties, which allows it to be used in vertical applications.

CLEANING INSTRUCTION AND MAINTENANCE

BENETTI high gloss acrylic laminates comes protected with high-quality protective film which is only removed at the completion of all installation work. After the protected film is removed, there is still presence of solvent from the adhesive coating of the protective film on the surface of the high gloss acrylic laminate. An electrostatic charge is built-in and attracts dust onto the surface of the panel.

During this time, the acrylic laminate surface also cures out under the influence of normal air humidity Under normal circumstances, the curing process will take approximately 72 hours for the surface to be totally cured in order to speed up the process, We recommend cleaning the high gloss surface with COLIN glass cleaner and soft micro fiber cloth.

WARNING

DO NOT use of the following cleaning products.

- * Alcohol-based cleaners
- * Solvent-based cleaners
- * Petrol, pinewood or oil based cleaners
- * Cloth other than a micro fiber

No Guarantee in any circumstances.

like crack, Bubble, Color Fade and color Variation










Please open the roll immediately, Do not pressurize while opening roll

KINDLY REFER **ZURICH**APPLICATION VIDEO



TO WATCH APPLICATION VIDEO SCAN HERE

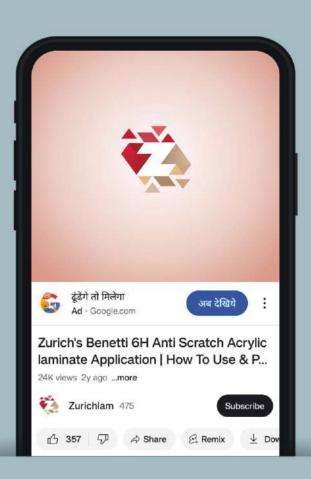

ZURICH WARRANTY

Our verbal and written advice relating to technical application is based on experience or stored and is correct to the best of our knowledge, and given without obligation. The use of ZURICH products by user in various conditions that are beyond our control. We recommend that the suitability of any ZURICH products for the intended application should be checked by user before the utilization. Utilization and processing of our products are beyond our control and are therefor exclusively user responsibility. Application errors, wether instability, low workmanship skill cause cracks and air bubble in Furniture. Inferior quality chemicals used substrate (plywood/MDF) cause yellow patches from back inside sheets. Due to import products company not get any warranty/ guarantee from supplier, so company can not give any warranty / guarantee also. No complaints will be attended and no claim will be settled. In the event of manufacturing defect ZURICH is liable to entertain it within one year from date of purchase, after one year from date of purchase company will not attend any type of complain. Any compensation will be limited to the value of the goods supplied by us and used by you. Please use only ZURICH bond for application "Benetti 6H Antiscratch Acrylic Laminates" for good bonding with substrate.

FEATURES



Treated with a special lacquer coating on the surface, our 6H anti scratch acrylic laminates can bear daily wear & tear.



Anti-Yellow UV Resistance



Lats of Range and Huge Collection



Our Anti Scratch Acrylic Laminates are Extremely Study and Durable. They Co



Our Laminate are specially treated to ensure they remain termite and borer free for several years



For ease of Use and Effortless installation, our Range of laminates Have been Developed in A Way to keep them Extremely Light Weight



Anti-bacterial and Anti-fungal



Low Porosity Low Water Absorption

APPLICATION



Kitchen Shutters



Wardrobe



Doors And Drawer Fronts



Office Spaces



Tv Unit



Furniture




MARBLESERIES



SUPERIOR COLLECTION





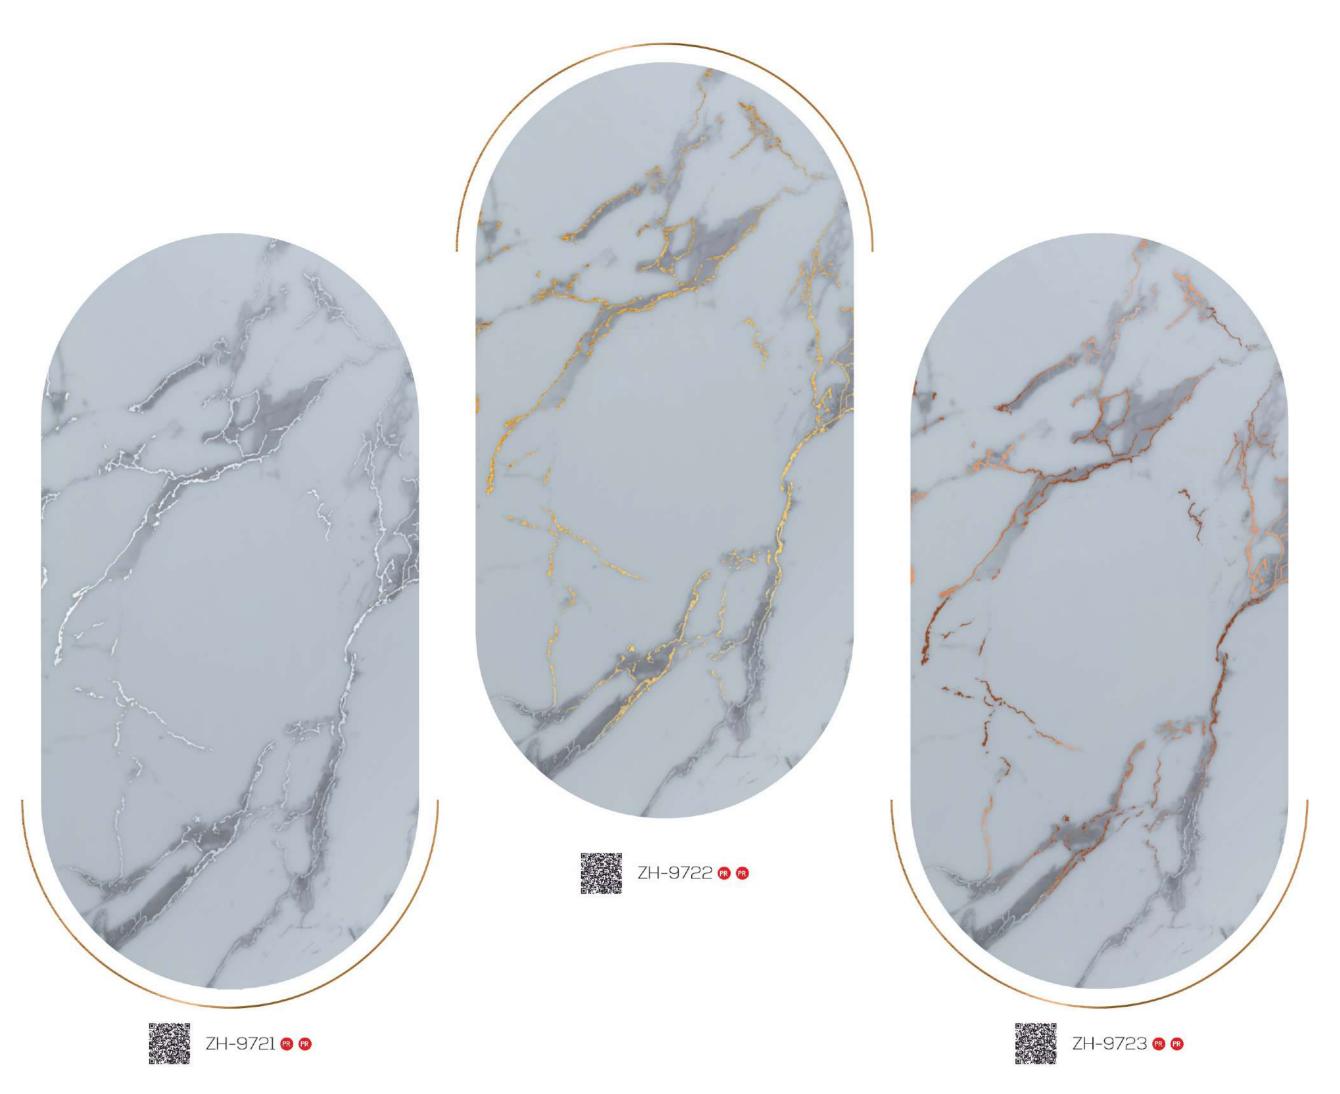

There can be colour variation in material from different batches, it is advised to use same batch material to avoid colour variations.

Actual colours of EDGE BAND may vary from the same color Acrylic Laminate Sheet. Actual color of Acrylic Sheet and EDGE BAND may vary from this brochure.


M A R B L E S E R I E S









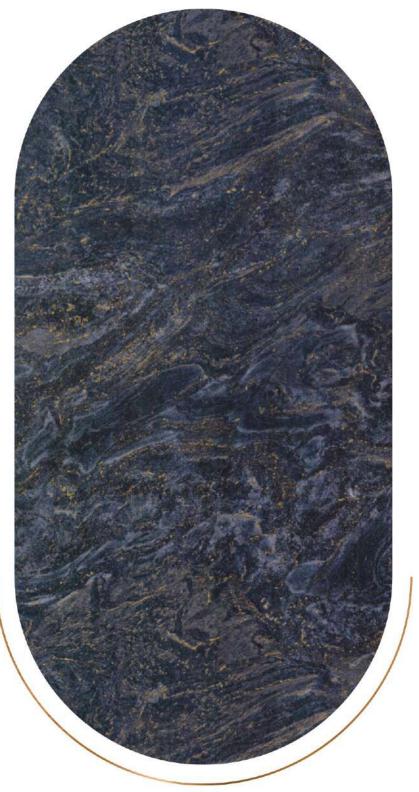












M A R B L E S E R I E S

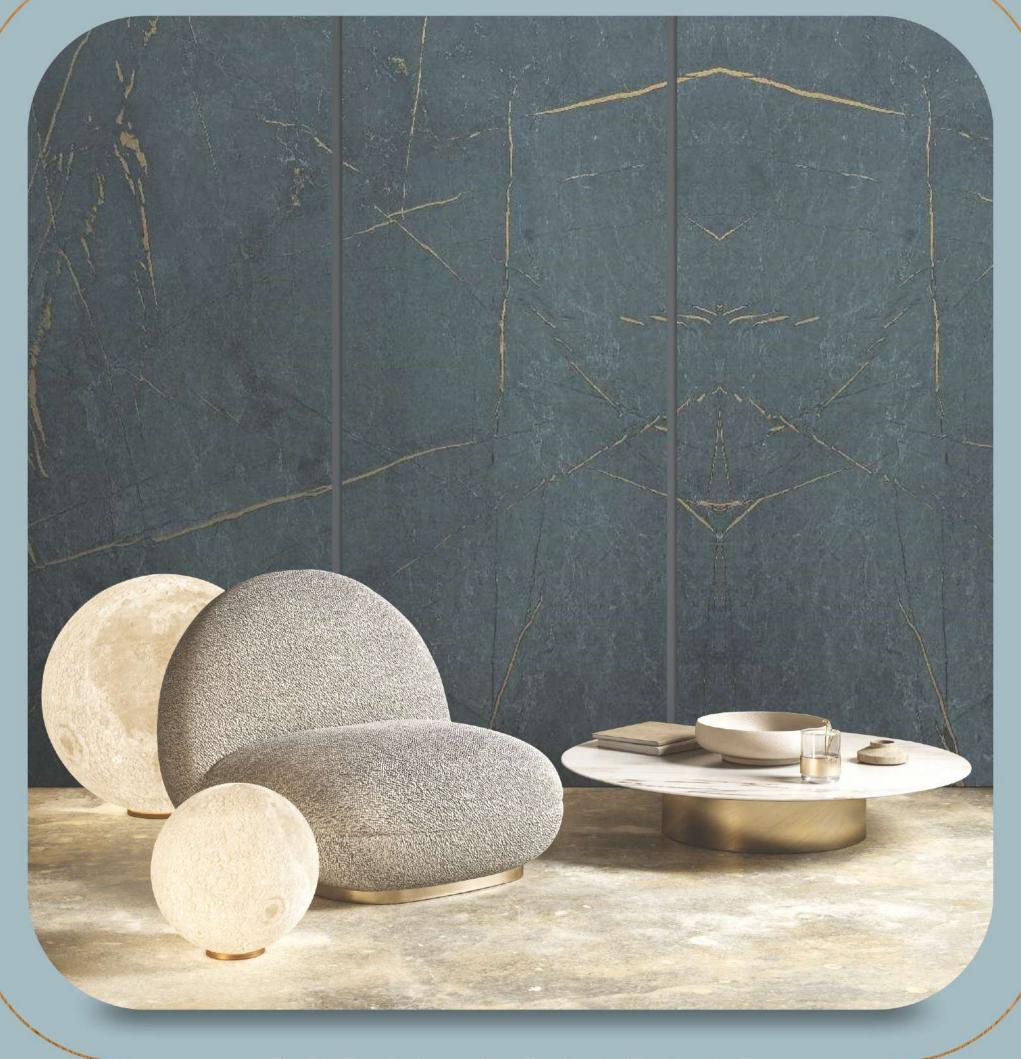

P R E M I U M E S S E N C E







M A R B L E S S E R I E S





















M A R B L E S E R I E S










M A R B L E S E R I E S



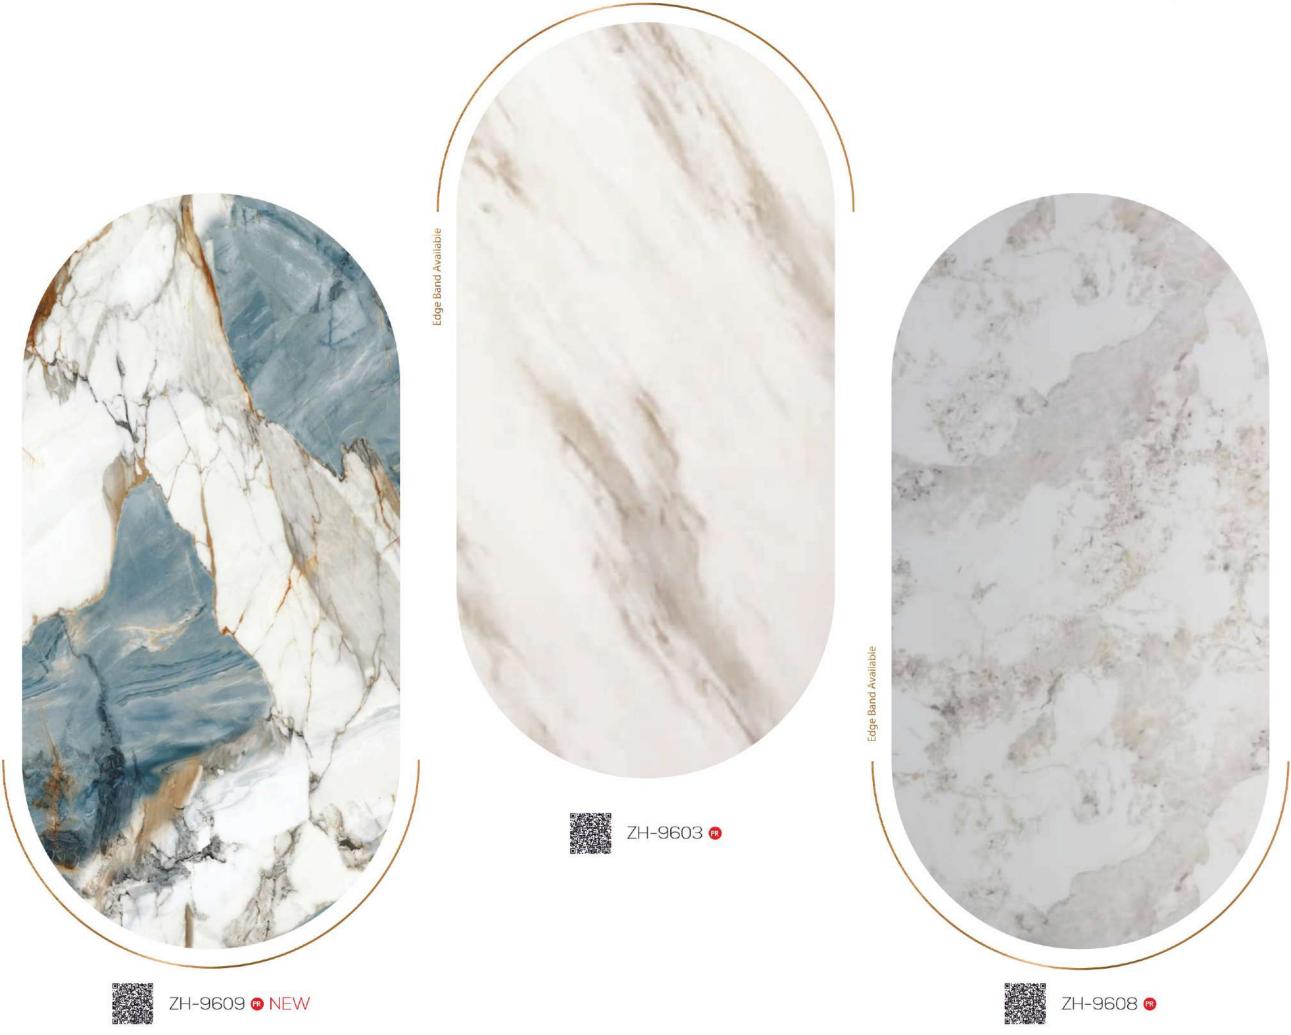










MARBLESERIES

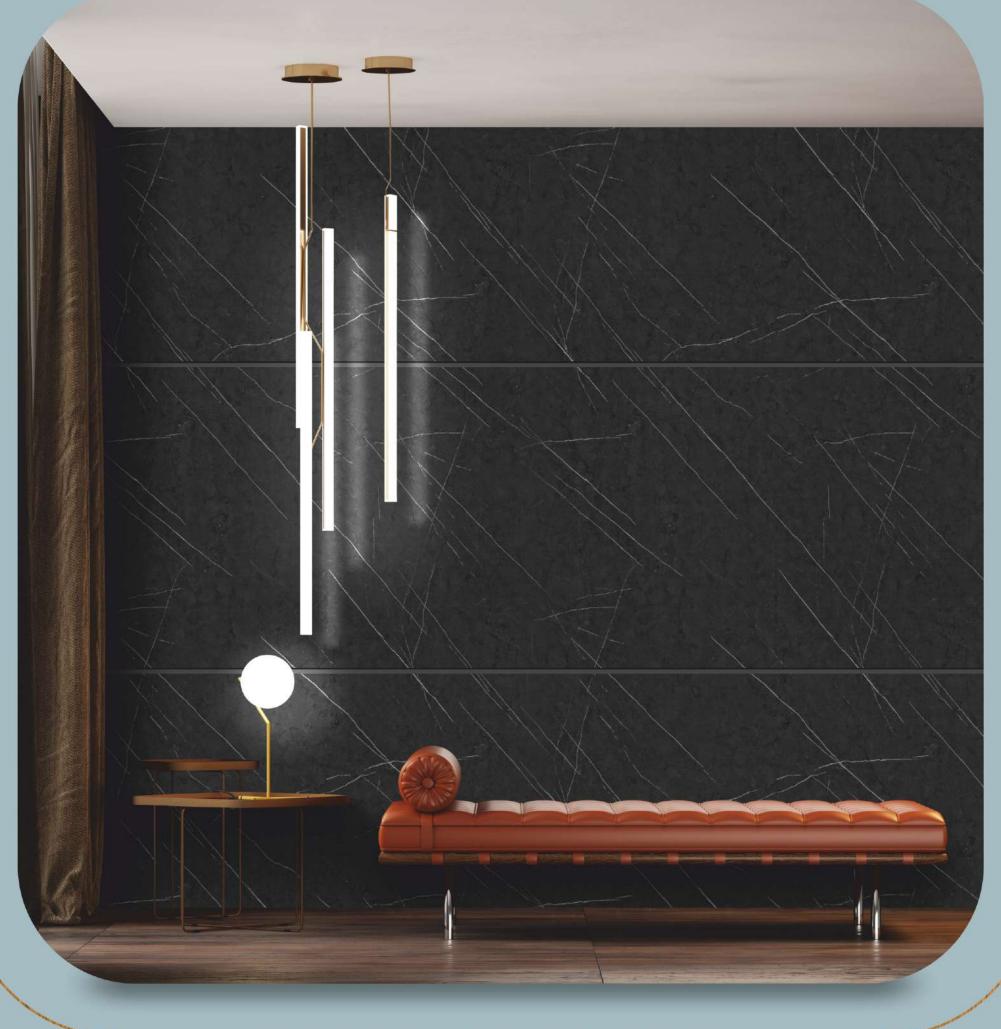

PRISTINE PANELS







MIRROR SERIES





UXURYLAYERS

APPLICATION METHOD

Self Adhesive

- Surface of Plywood/MDF must be dust free to use self adhesive mirror Acrylic Sheet
- For Better result It is advise to stick on matte finish surface laminate.
- Do not use zurich glue, white glue, silicon, araldite, Synthetic Rubber Adhesive or any other Adhesive for pasting.







P L A I N S E R I E S









ALL COLOR EDGE BAND AVAILABLE (SIZE - 23 mm X 1mm X 25 mtr)







[19.20]



P L A I N S E R I E S














ALL COLOR EDGE BAND AVAILABLE (SIZE - 23 mm X 1mm X 25 mtr)

P L A I N S E R I E S



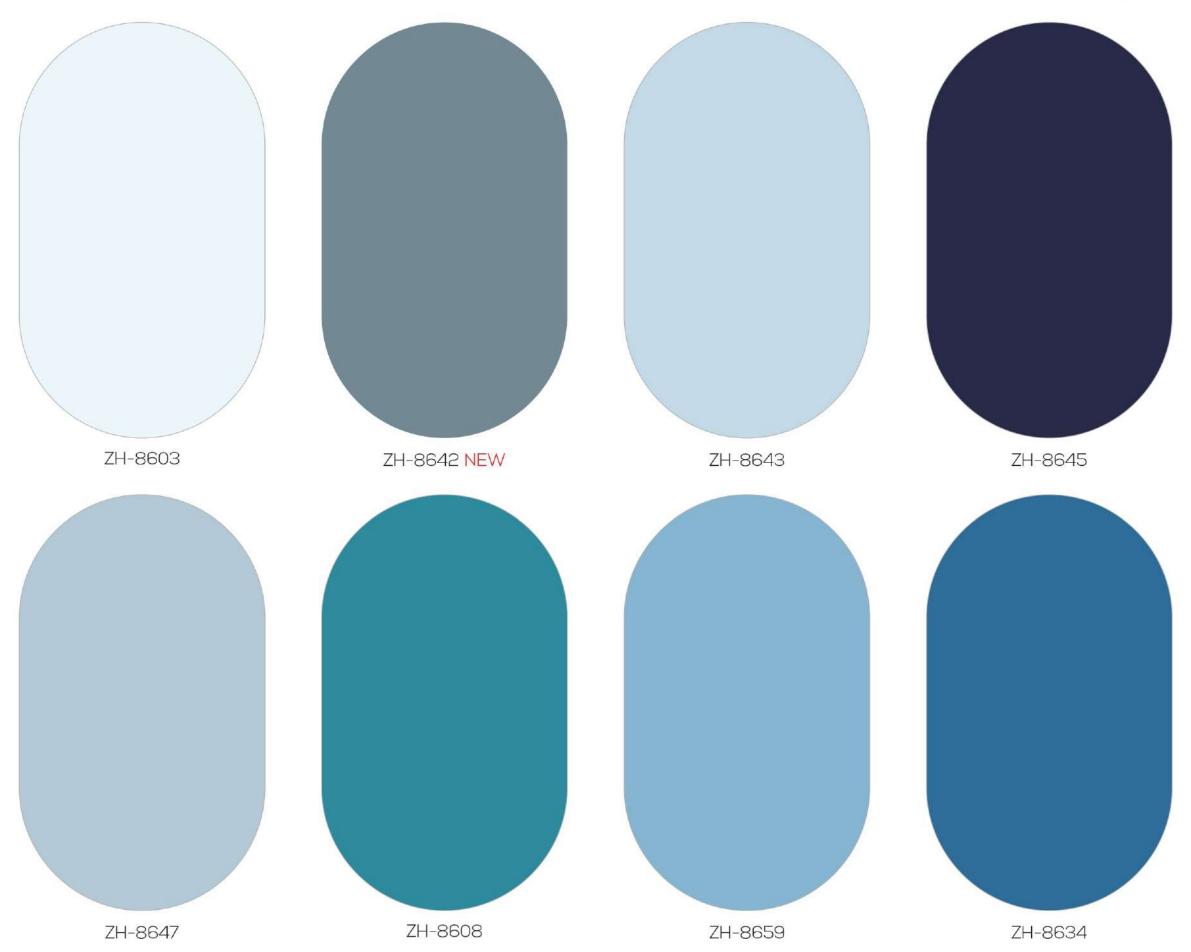





ALL COLOR EDGE BAND AVAILABLE
(SIZE - 23 mm X 1mm X 25 mtr)









P L A I N S E R I E S



SUPREMESHINE












ALL COLOR EDGE BAND AVAILABLE
(SIZE - 23 mm X 1mm X 25 mtr)

P L A I N S E R I E S



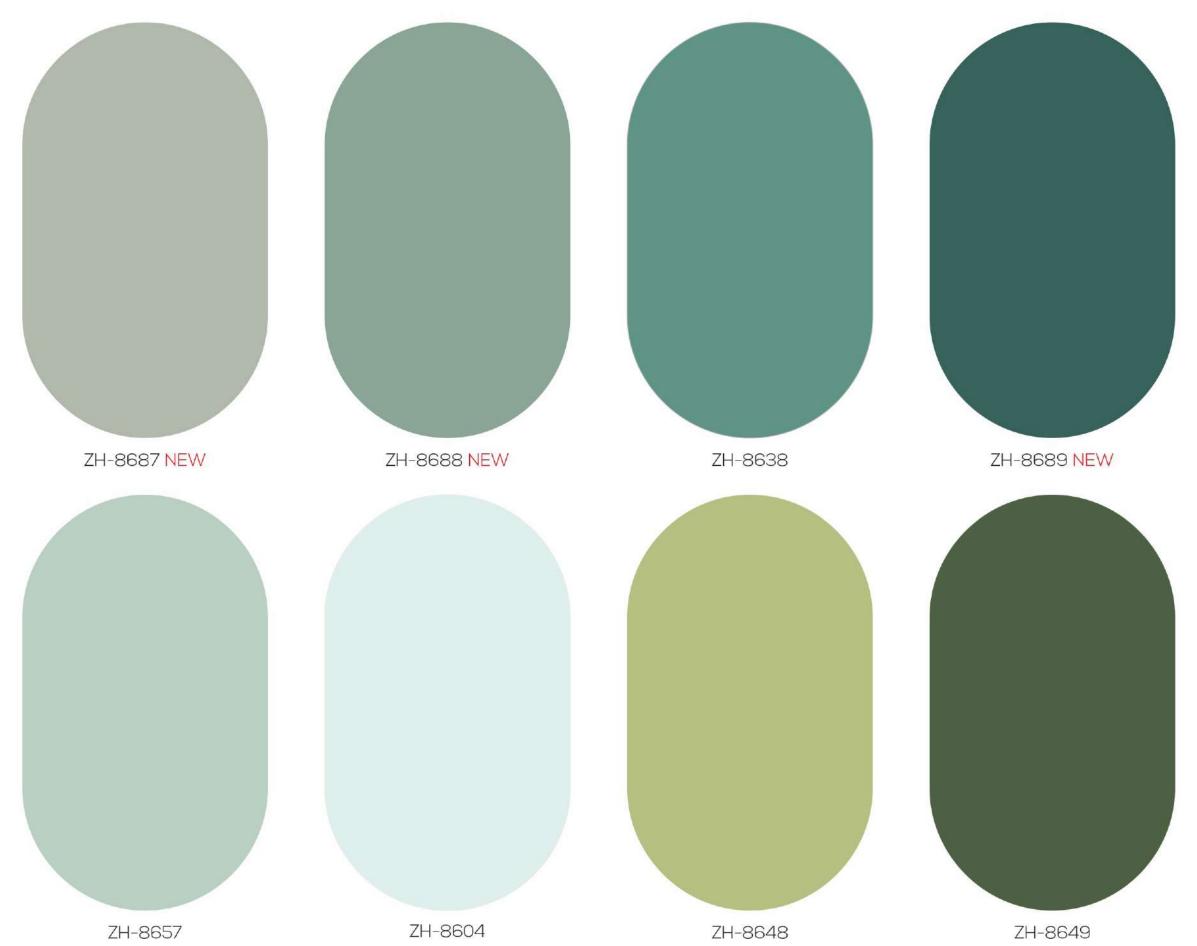






ALL COLOR EDGE BAND AVAILABLE
(SIZE - 23 mm X 1mm X 25 mtr)





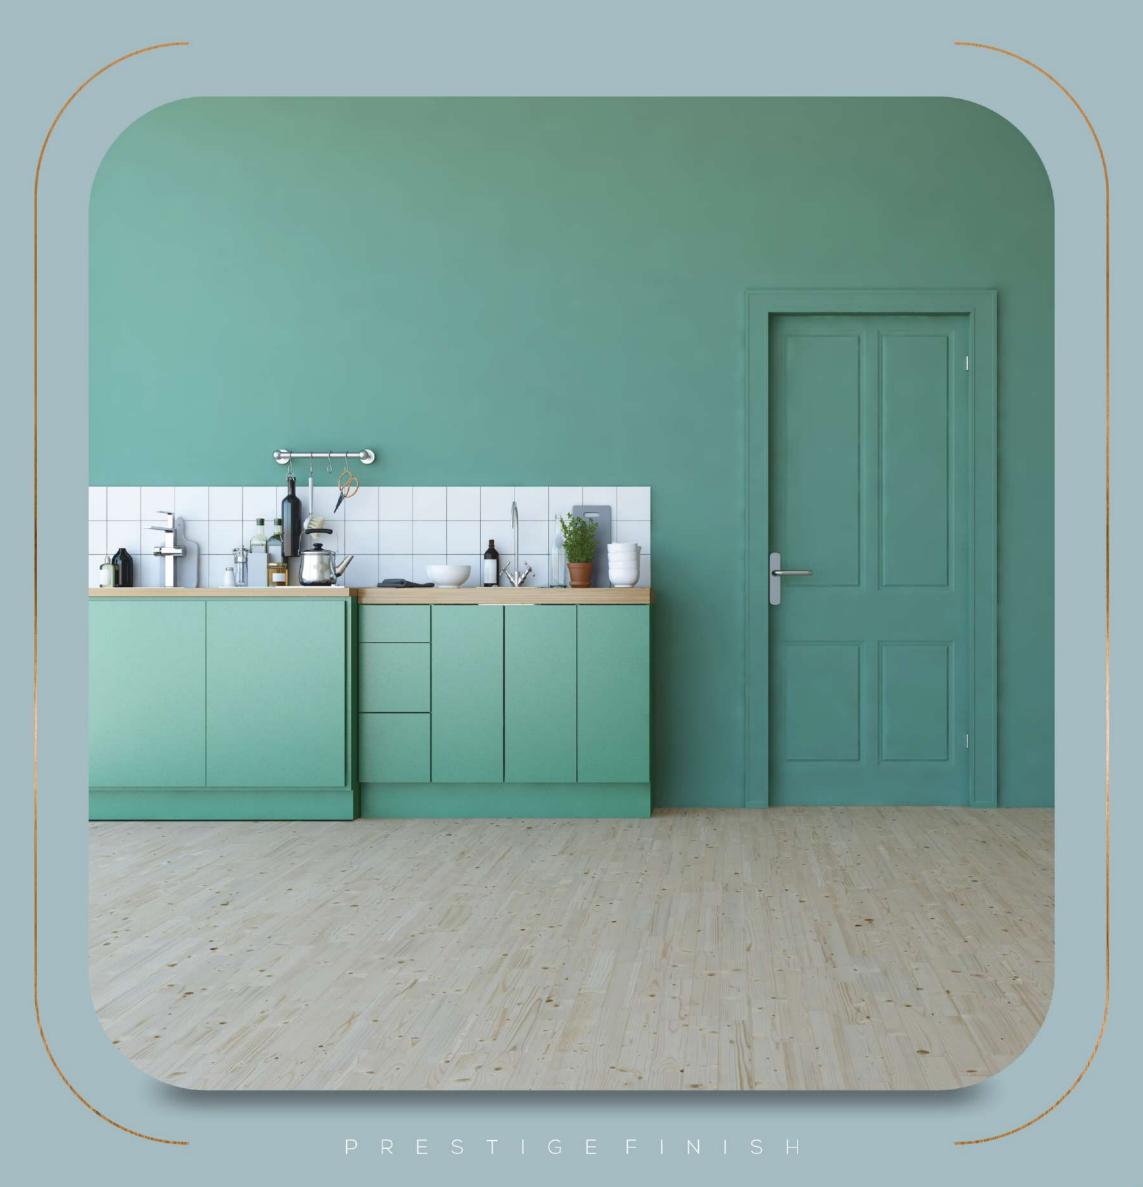

[27•28]




P L A I N S E R I E S

INFINITELAYERS





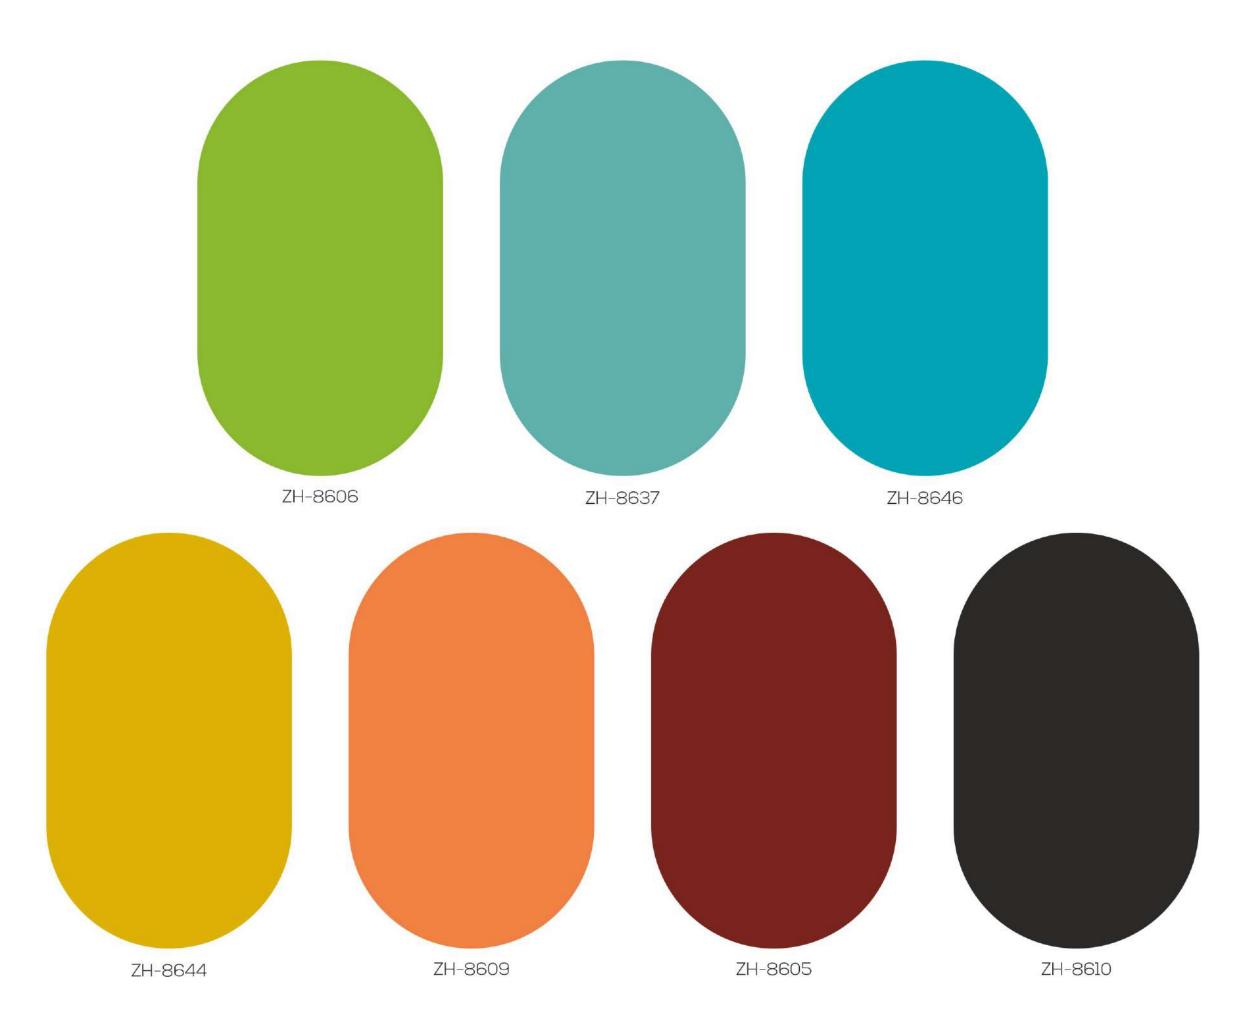





ALL COLOR EDGE BAND AVAILABLE (SIZE - 23 mm X 1mm X 25 mtr)

M E T T A L L I C S E R I E S









ALL COLOR EDGE BAND AVAILABLE (SIZE - 23 mm X 1mm X 25 mtr)







[31.32]



METTALLICSERIES



MAJESTICFINISH












ALL COLOR EDGE BAND AVAILABLE
(SIZE - 23 mm X 1mm X 25 mtr)

M E T T A L L I C S E R I E S



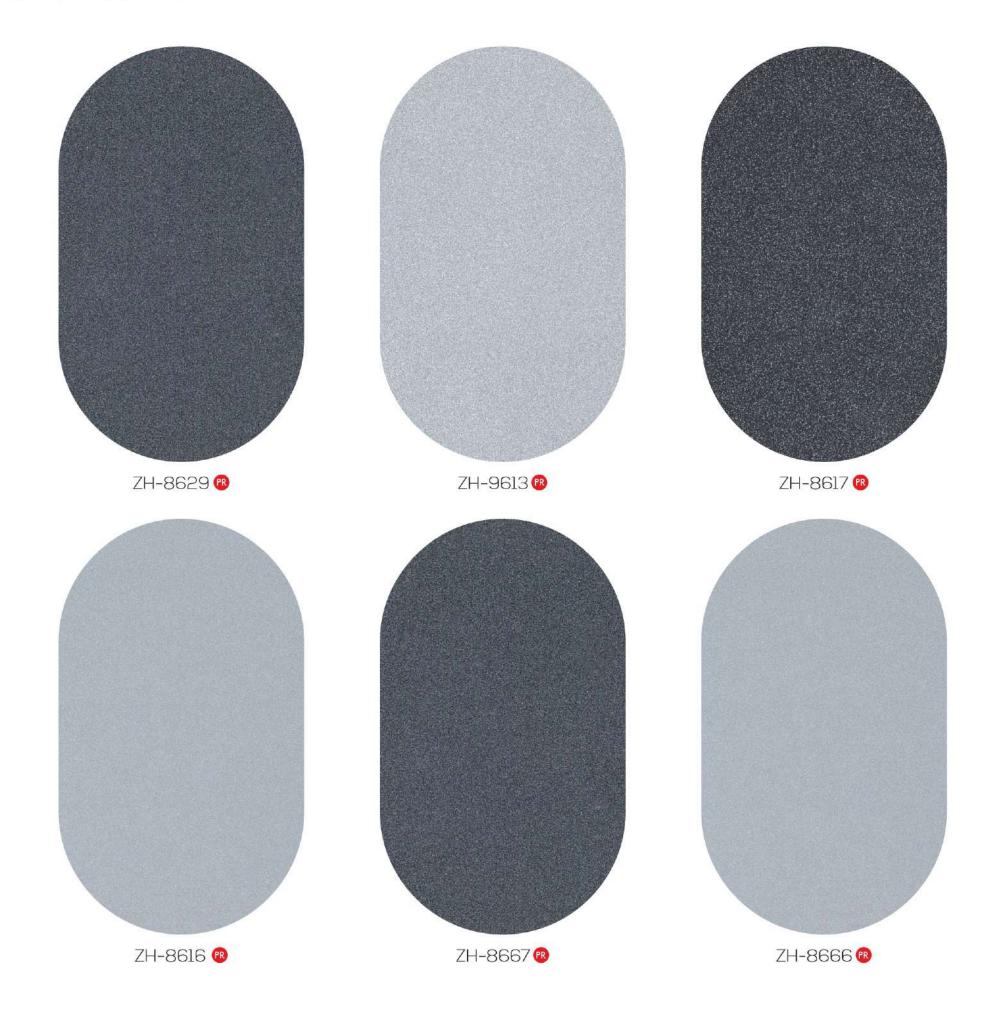





ALL COLOR EDGE BAND AVAILABLE (SIZE - 23 mm X 1mm X 25 mtr)







[35•36]



WOODDESIGN



GRANDDESIGN











ALL COLOR EDGE BAND AVAILABLE (SIZE - 23 mm X 1mm X 25 mtr)

WOOD DESIGN










ZH-9641 🔞



ZH-9636 🔞



ZH-9637 🔞






ALL COLOR EDGE BAND AVAILABLE
(SIZE - 23 mm X 1mm X 25 mtr)





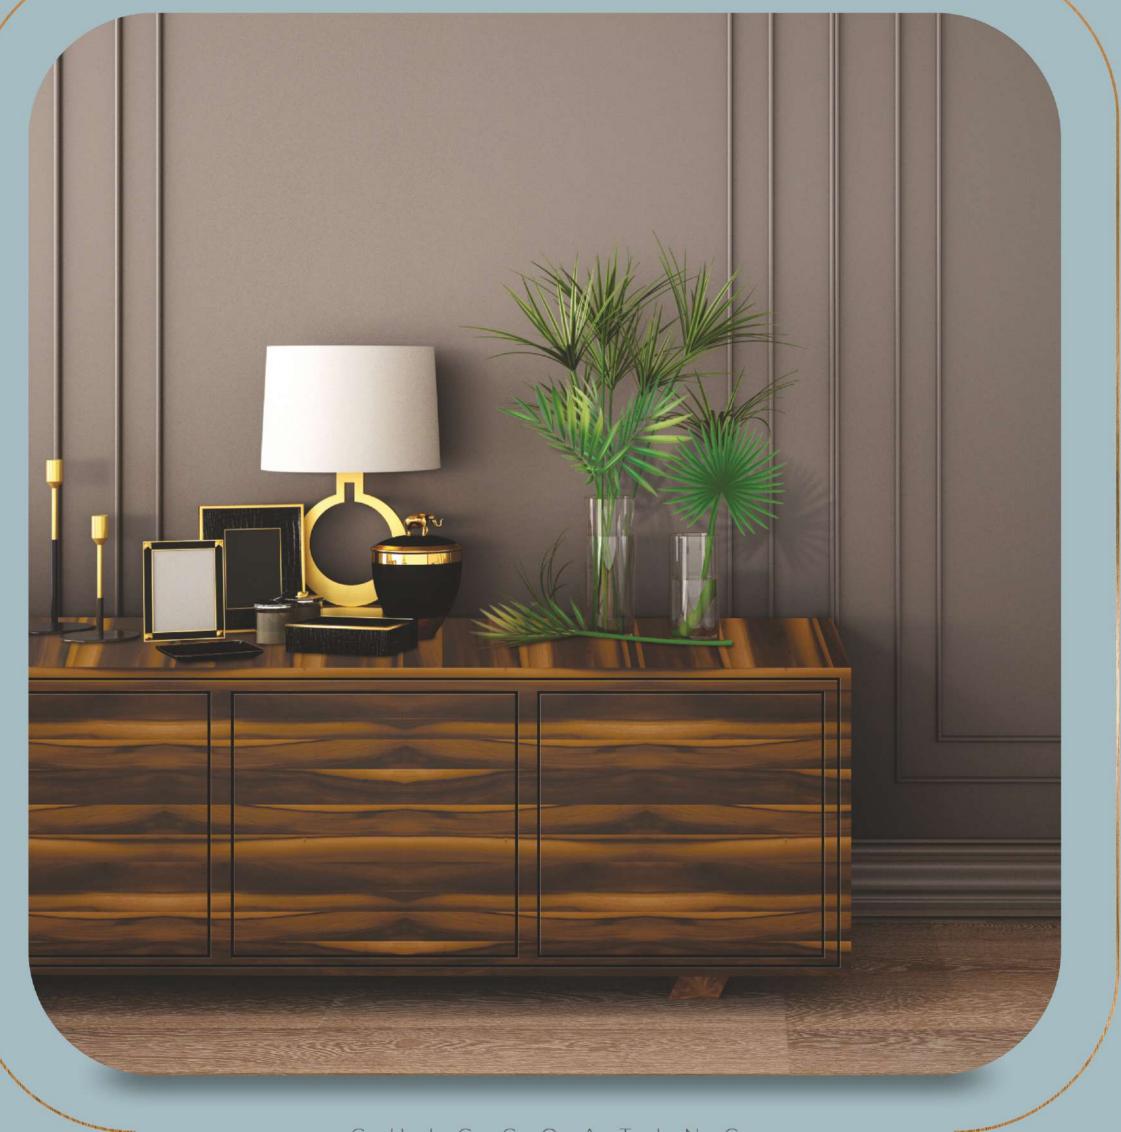

reasons for air bubble formations on acrylic sheets

To avoid de lamination / air bubbles in between ply and laminate the above steps should be taken care of. Bonding of acrylic sheets shouldn't be completed under high humidity



Debonding in certain areas because of uneven substrate surface



Acrylic are bonded in extremely humid conditions

ite surface



Use of water base synthetic resin adhesive any other the PEVA (Polyethylene Vinyl Acetate Co-polymer)

Insufficient or lack of pressing during the bonding period of laminate



(more



When substrate loses moisture after installation

Use of extremely large acrylic/PVC laminate sheets (more than 8 ft x 2 ft long)



Causes of yellow patches and colour fading after installation:



Exposure to direct sunlight can gravely affect a laminate's appearance



Use of inferior or sub-standard dipped plywood or dipped lipping patti, which may chemically react with the adhesive



The use of synthetic rubber adhesives such as SR / Jat Pat, Bostic, Heatx, etc.



Prolonged exposure to high temperature (above 30°C ~ 35°C)



If hot cookware or utensils are directly placed on the laminate







Causes Of Crack Lines Or Stretch Lines In Benetti Acrylic Laminates Sheets.



To avoid the inside cracks & stretch line Do not store acrylic sheet in roll form.



LOOKOUT FOR THIS STICKER ON SHEET



RECOMMENDED ADHESIVE FOR PRESSING



HIGH STRENGTH BOND Now Available in: 800gm. & 4 Kg.

PARAMETER COMOPARISON

Parameters	Benetti ACRYLIC LAMINATE	High Gloss LAMINATES Mica	PU Coating / Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Anti scratch	No	No	No
Color Consistency	Excellent	Not good	Not good	Not good
Orange Peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes

There can be colour variation in material from different batches, it is advised to use batch material to avoid colour variations. Actual colours of EDGE BAND may vary from the same colour Acrylic Laminates. Actual colour of Acrylic Sheet and EDGE BAND may vary from this brochure









Our Range of **Products:**















