





REASON TO CHOOSE





HYBRID ACRYLIC LAMINATE

It is made from different technology called co-extrusion line. This technology makes

Acrylic strong and durable and no Gum marks or chemical reaction appears after installation.



• 100% VIRGIN ACRYLIC

It is made of 100% virgin acrylic so that you can get best quality product..



• NO CRACKS

Hybrid Acrylic does not develop inside cracks which is the specialty of this laminate



• 6H ANTI - SCRATCH

It has 6H anti-scratch coating on top which protects the surfaces from scratches..



RUBBER ADHESIVI

Thanks to hybrid technology we can use SR or any other rubber adhesive to stick the laminate.

A B O U T U S

Zurich is a company known for its exceptional product offerings, which have supremely infinite application potential both in indoor and outdoor settings. Over the years, Zurich has created a special place for itself in the market, with it being the preferred choice of many consumers and influences alike. With a robust team and an able production facility to back it, Zurich has developed a huge range of high-quality decorative NEX HYBRID ACRYLIC Its range is entirely manufactured as per the internationally accepted standards of quality.

Zurich has already become a popular entity in the Indian market thanks to its impressive product range. But Zurich has also given ample focus to its growth in the foreign markets as well with a far-reaching export network that promises to change lifestyles and décors globally. Driven by its core principles of excellence and ethics, Zurich is moving forward with a mission to adorn as many décors as possible.










HY - 9101	Star White	HY - 9102	Snow White	HY - 9103	Aqua Glass
EB - 9101		EB - 9102		EB - 9103	









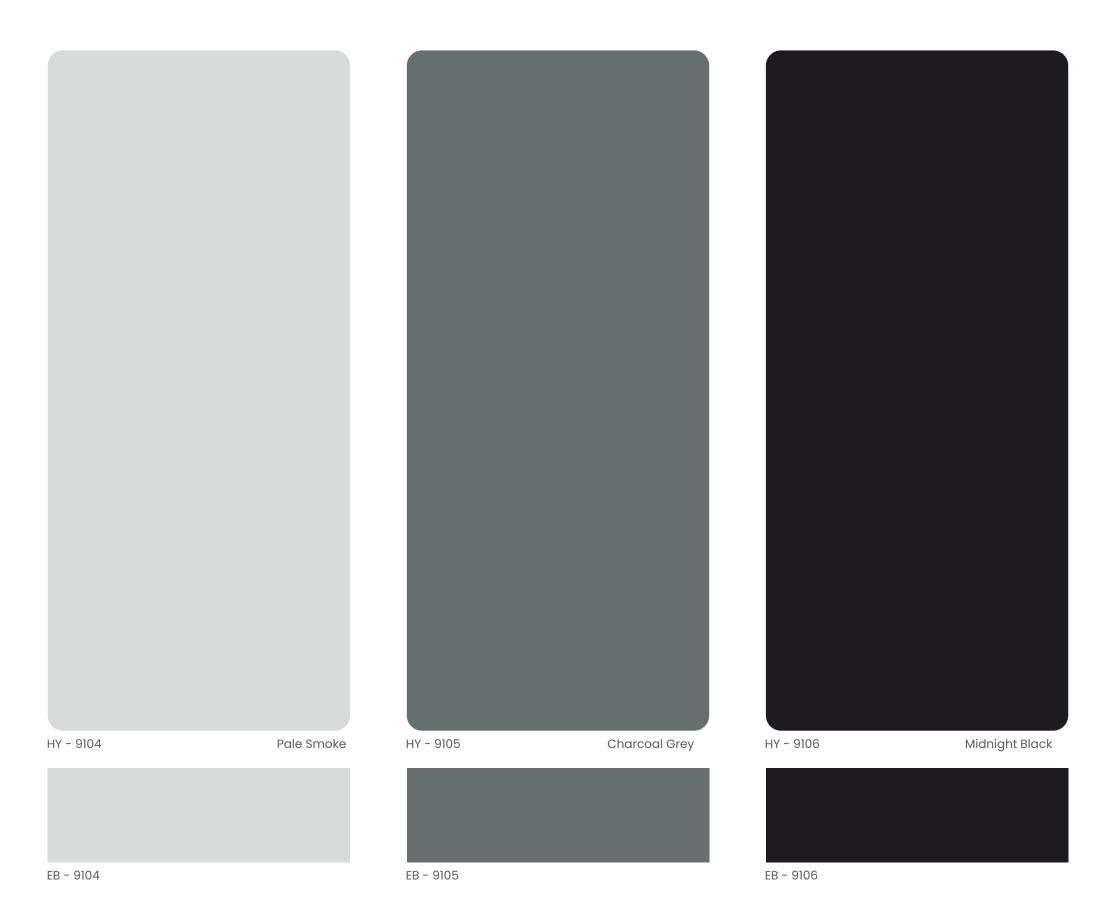























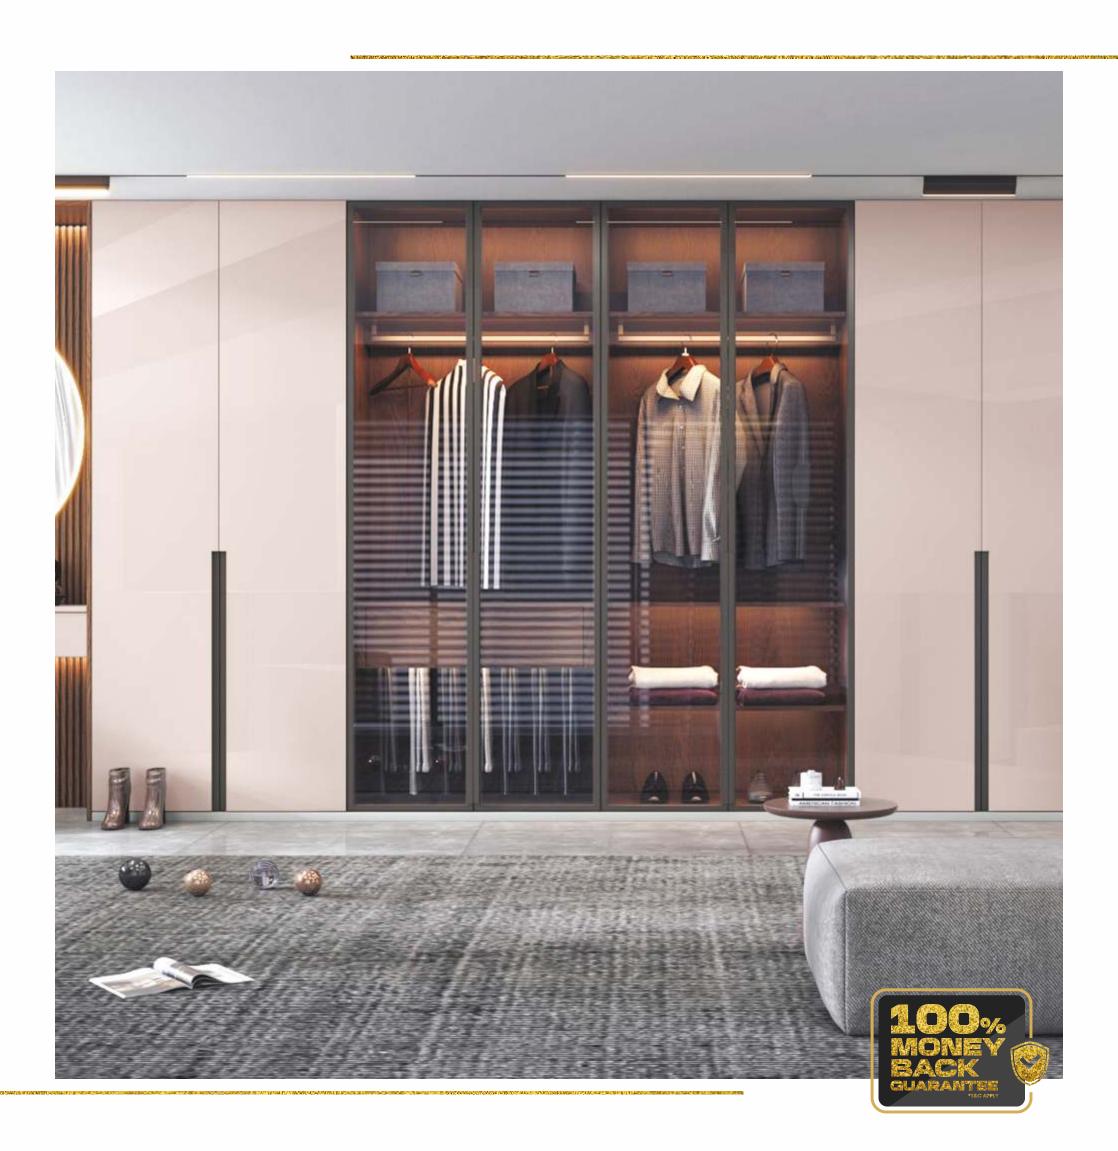







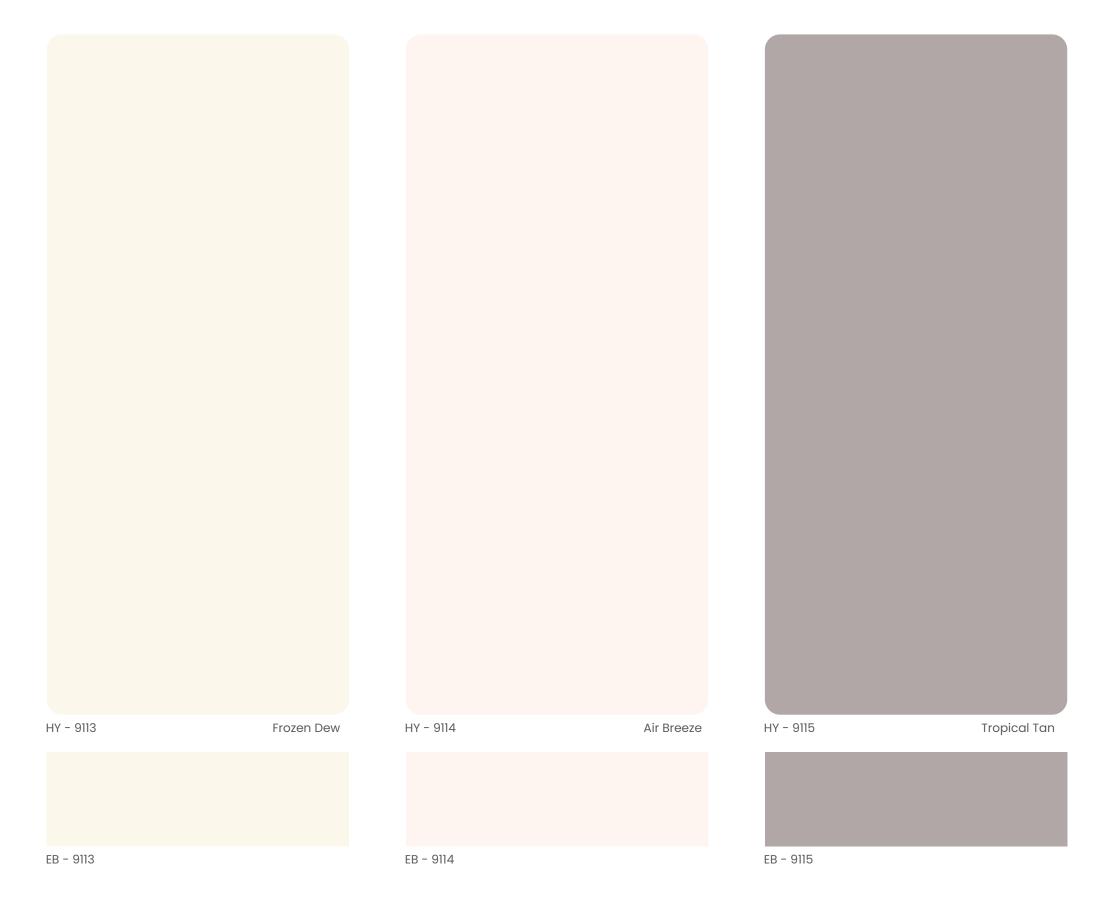




















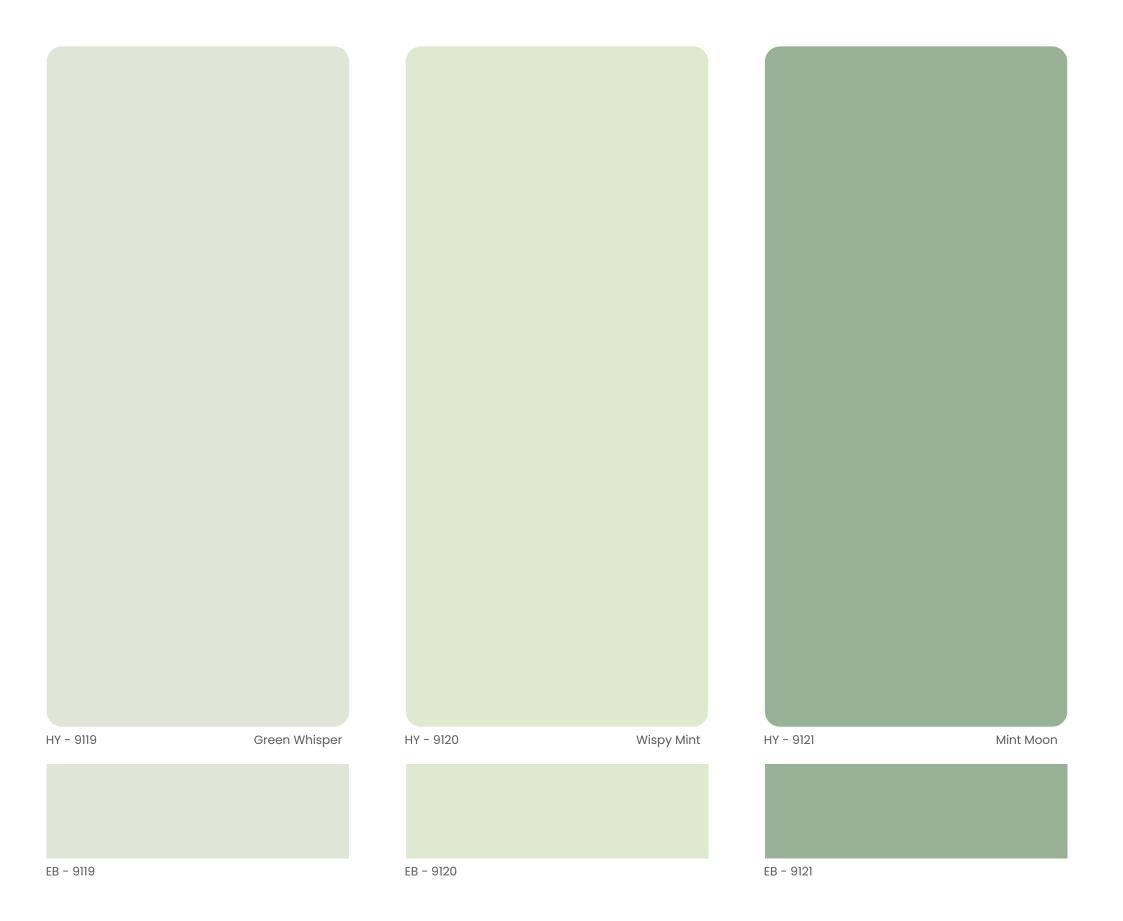










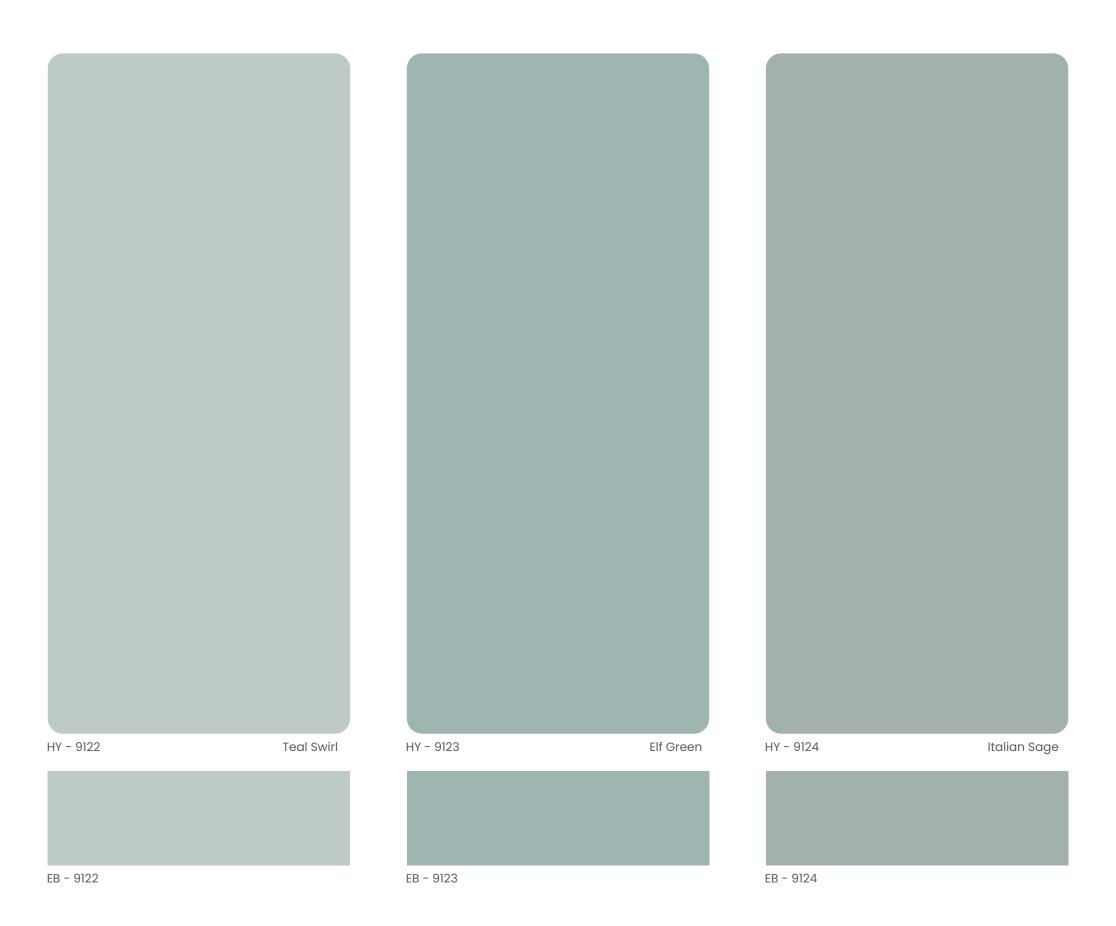










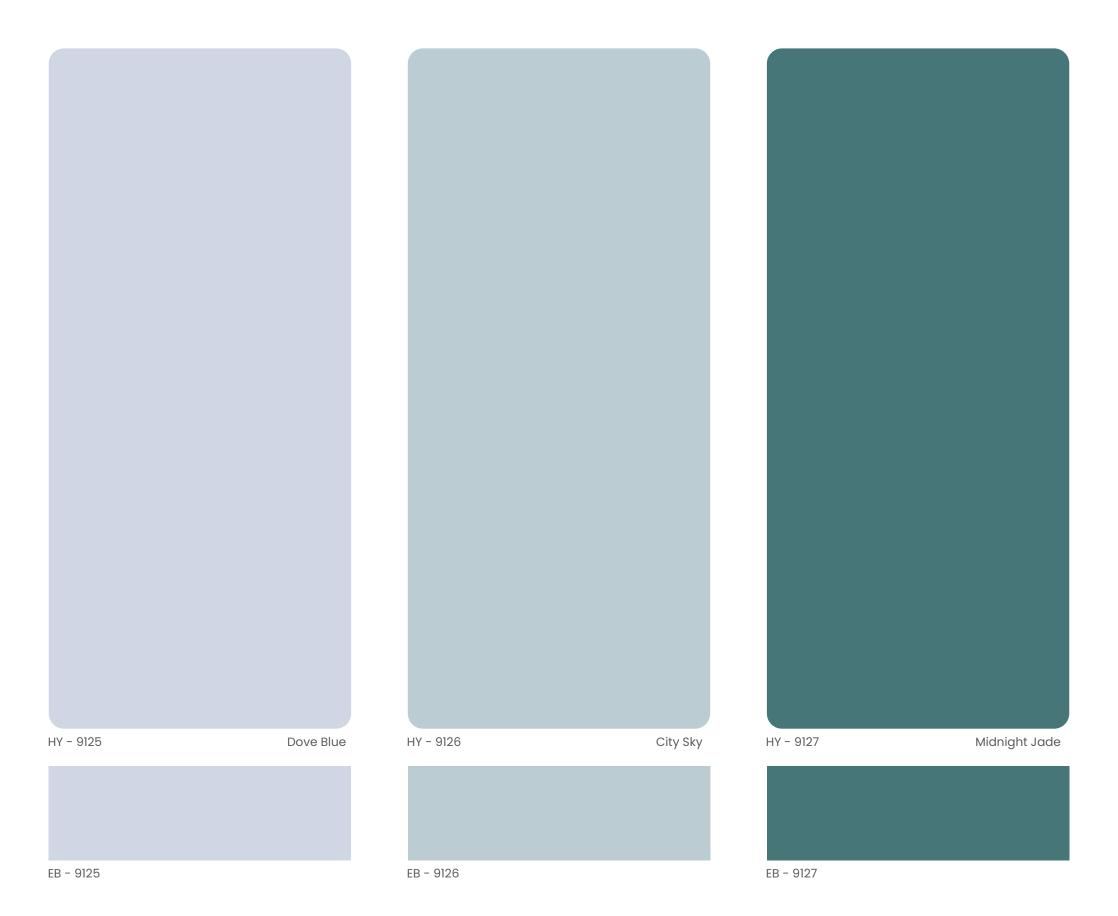










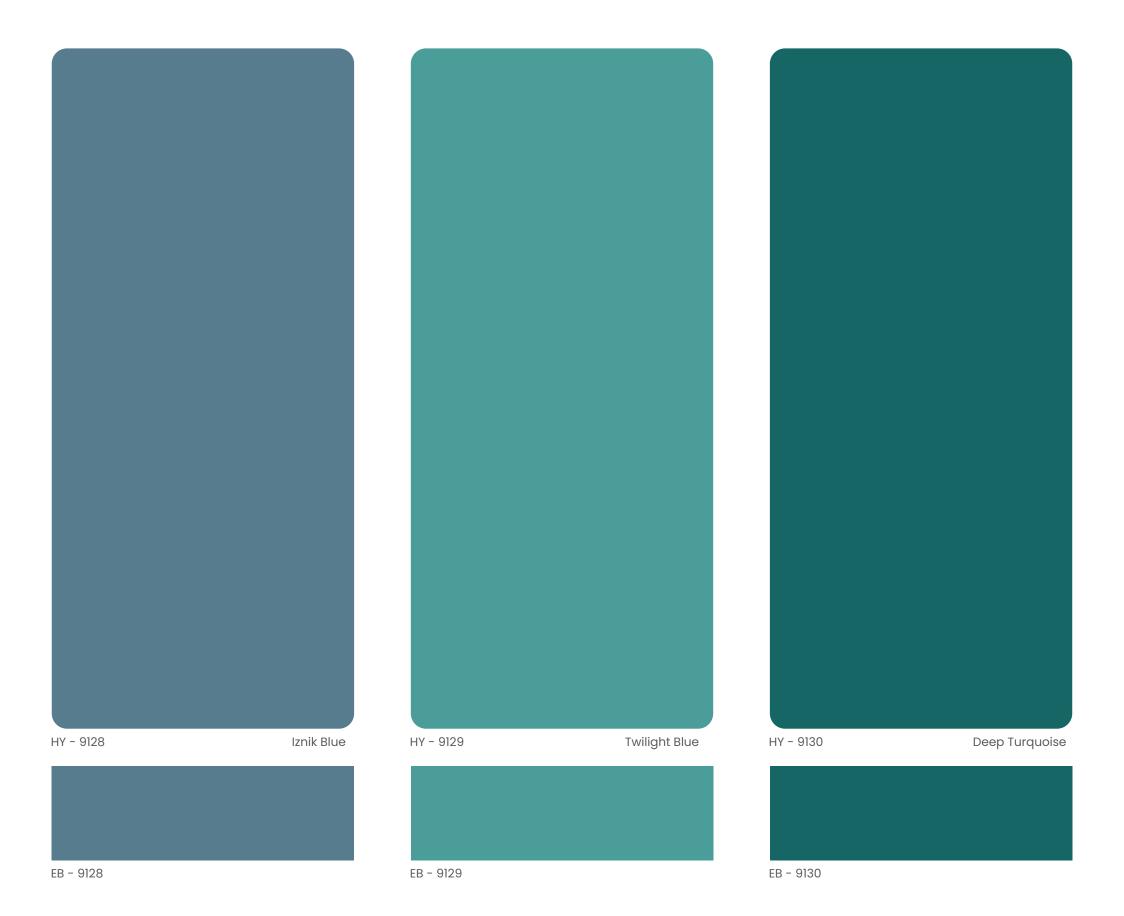

REASONS FOR AIR BUBBLE FORMATIONS ON ACRYLIC SHEETS

To avoid de lamination / air bubbles in between ply and laminate the above steps should be taken care of. Bonding of acrylic sheets shouldn't be completed under high humidity





Acrylic are bonded in extremely humid conditions



Debonding in certain areas because of uneven substrate surface



Use of water base Resin adhesive or any other PEVA (Polyethylene Vinyl Acetate Co-polymer)



Insufficient or lack of pressing during the bonding period of laminate



When substrate loses moisture after installation



Use of extremely large acrylic / PVC laminate sheets (more than 8 ft x 2 ft long)

DISCLAIMER

Do not use plywood with high moisture content, Do not use ply with uneven surface, Avoid using inferior quality adhesive, Apply sufficient pressure We do not recommend pasting of sheets on the printed/branding area of the plywood

DO'S & DON'T'S

- 1. Clean the surface of laminate with water and clean, non-abrasive cloth. We recommend cleaning with COLIN glass cleaner and soft Micro fibre cloth.
- 2. Glossy surfaces recommended to use in vertical applications.
- 3. Do not use alcohol based cleaners, solvent, petrol or oil as these may damage the surface of the laminate. Do not use cloth other than micro fibre.
- 4. Do not use thinner on the surface of NEX HYBRID ACRYLIC laminates.
- 5. Do not place hot cookware directly on the laminate as the exposure to temperatures above 30°C may cause damage to the laminate surface.
- 6. Outdoor application of the laminate with exposure to direct sunlight and weather conditions are strictly not recommended. UV rays may de-shape the laminate.

Parameters	Hybrid Acrylic	Regular Acrylic	
Gloss level	Excellent	Good	
Anti-Scratch	6H anti scratch	2H/4H/6H	
Inside Cracks	No	Yes	
White patches	No	Yes	
100% Acrylic	100% virgin Acrylic	Recycled Acrylic/ pvc mix	
Delamination	No	Possible	
Backside scratches	No	Possible	









TERMS AND CONDITIONS OF MONEY BACK GUARANTEE

ZURICH NEX HYBRID ACRYLIC product that you have purchased is of excellent quality and make, and therefore the company offers warranty on the product. Any defect in the product shall be repaired or, in the event of it being irreparable, replace subject to the following terms and conditions.

This warranty is limited only to the ZURICH NEX HYBRID ACRYLIC.

- The warranty is limited in nature and extends only to manufacturing defects.
- The company shall not entertain liabilities arising out of any consequential damages or remote damages that the company limits its liability only to the extent of the value of the product.
- The company reserves the right to retain the product replaced at its discretion in the event of a defect noticed in the product. The company shall have the exclusive right to replace the Defective product with a design the same as the existing one.
- The warranty does not cover the demonstration or installation of the product.
- The company's obligation under this warranty shall be limited to providing replacement of the product or its part which are found to be defective.
- The company shall not be liable for a refund of the price of the furniture or any other thing, place or area wherein the product was used and was subsequently found to be defective.
- That the company shall not be liable for any consequential, indirect, special, collateral or exemplary damage arising out of the use of the product.
- This warranty does not cover damage caused by Air bubble, accident, improper care, mishandling, negligence, normal wear and tear or the natural breakdown of colours and materials over extended time and use or any other reason as mentioned in points above.
- Our verbal and written advice relating to technical application is based on experience or stored and is correct to the best of our knowledge, and given without obligation.
- The use of Zurich products by user in various conditions that are beyond our control. We recommend that the suitability of any ZURICH products for the intended application should be checked by user before utilization.
- In the event of manufacturing defect ZURICH is liable to entertain it within one year from date of purchase, after one year from date of Purchase Company will not attend any type of complain.
- We highly recommend to use ZURICH BOND for application of ZURICH NEX HYBRID ACRYLIC.



HIGH STRENGTH BOND

NOW AVAILABLE IN: 800 gm. & 4 kg. RECOMMENDED ADHESIVE FOR PRESSING



FOR ASSURED GENUINE PRODUCTS



LOOKOUT FOR THIS STICKER ON SHEET





www.zurichlam.in
info@zurichlam.in
g zurichlam
Zurichlam
Zurichlam